


E37114 PRIMO Glossy 190

Cast-coated glossy paper

Printability

- duplex printable

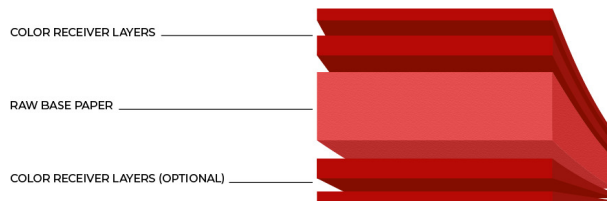

Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m ²	190	± 9,5
Thickness	DIN EN ISO 534	µm	225	± 15
	DIN EN ISO 536	mil	8,9	± 0,59
Gloss BYK	ISO 2813	60°	>73	
Colour Elrepho UVO (D65)	ISO 2469	L	93,5	± 1
		a	3,8	± 0,3
		b	-17,5	± 1,1
Opacity min.	ISO 2469	%	> 85	

Printing Technology

- Inkjet water-based

Key Applications

- Photo cards
- Photos
- Newsletter
- Photo gifts
- Greeting and invitation cards

Benefits & Properties

- Pin-sharp details
- High colour consistency and gamut
- Instant dry

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

felix-schoeller.com



FELIX SCHOELLER