


# H71710 TRUE photo Glacier 275

## Microporous Resin-Coated Paper

### Printability

- simplex printable

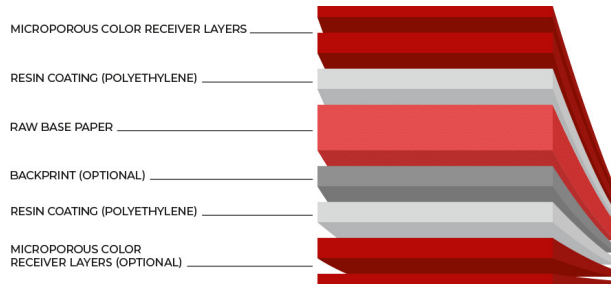

### Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m <sup>2</sup>	268	± 7
Thickness	DIN EN ISO 534	µm	262	± 6
	DIN EN ISO 536	mil	10.3	± 0.23
Gloss BYK	ISO 2813	60°	18	± 5
Colour Elrepho UVO (D65)	ISO 2469	L	94,5	± 0,6
		a	-0,2	± 0,5
		b	-1,8	± 0,8
		delta b	9,9	± 0,8
CIE Whiteness (D65/10°) min.	ISO 2469		> 139	
Opacity min.	ISO 2469	%	> 90	

### Printing Technology

- Inkjet water-based

### Key Applications

- Art reproduction
- Exhibitions
- Photos
- Photo cards
- Photo cards
- Photo Retail
- Portfolio folders

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**

# H71710 TRUE photo Glacier 275

Microporous Resin-Coated Paper

## Benefits & Properties

- Pin-sharp details
- High colour consistency and gamut
- Vivid colours
- High colour consistency
- Water resistance
- High opacity
- High light fastness
- Outstanding lay-flat performance

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](https://www.felix-schoeller.com)



**FELIX SCHOELLER**