


J22274 TRUE fibre Matt 210

Special-Coated Matt Paper

Printability

- duplex printable

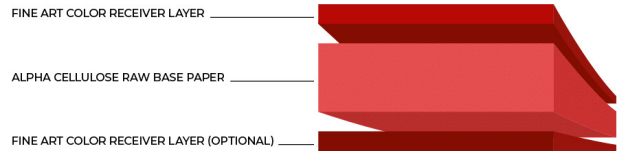

Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m ²	207	± 7
Thickness	DIN EN ISO 534	µm	322	± 15
	DIN EN ISO 536	mil	12.6	± 0.6
Colour Elrepho UVO (D65)	ISO 2469	L	97,8	± 1
		a	0,2	± 0,5
		b	2,35	± 1
		delta b	-0,7	± 0,8
CIE Whiteness (D65/10°) min.	ISO 2469		> 78	
Opacity min.	ISO 2469	%	> 93	

Printing Technology

- Inkjet water-based

Certificates

- ISO 9706

Key Applications

- Professional Photo & Fine Art
- Portfolio folders
- Exhibitions
- Black and white photography
- Professional photo albums

Benefits & Properties

- Very smooth surface
- Pin-sharp details
- Vivid colours
- High colour consistency and gamut
- Made from alpha cellulose
- Meets criteria for permanence according ISO 9706

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

felix-schoeller.com



FELIX SCHOELLER