


J23160 TRUE baryta Satin 310

Microporous Baryta-Coated Paper

Printability

- simplex printable

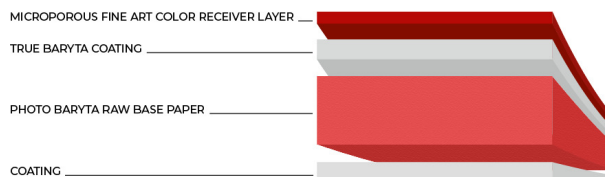

Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m ²	303	± 8
Thickness	DIN EN ISO 534	µm	295	± 15
	DIN EN ISO 536	mil	11.6	± 0.59
Gloss BYK	ISO 2813	60°	20	± 5
Colour Elrepho UVO (D65)	ISO 2469	L	96,4	± 1
		a	-0,1	± 0,3
		b	1,1	± 0,5
		delta b	2,8	± 0,8
CIE Whiteness (D65/10°) min.	ISO 2469		> 90	
Opacity min.	ISO 2469	%	> 93	

Printing Technology

- Inkjet water-based

Certificates

- ISO 9706

Key Applications

- Black and white photography
- Exhibitions
- Photos
- Photo cards
- Portfolio folders
- Professional Photo & Fine Art

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

felix-schoeller.com



FELIX SCHOELLER

J23160 TRUE baryta Satin 310

Microporous Baryta-Coated Paper

Benefits & Properties

- Pin-sharp details
- High colour consistency and gamut
- Maximum optical densities (Dmax of ≥ 2.4)
- High colour consistency
- Calcium carbonate buffered
- Smell, look and feel of a traditional baryta photo paper

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

felix-schoeller.com



FELIX SCHOELLER