


# J24000 TRUE rag silk Satin 310

## Microporous Coated Rag Paper

### Printability

- simplex printable

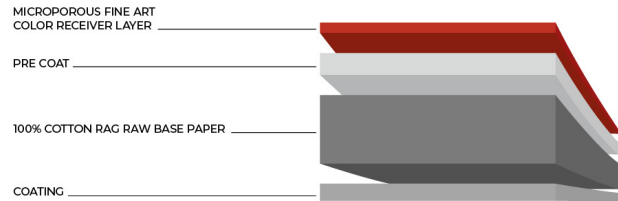

### Product Specification

| Property                     | Test Method    | Dimension        | Target | Tolerance |
|------------------------------|----------------|------------------|--------|-----------|
| Weight                       | DIN EN ISO 536 | g/m <sup>2</sup> | 307    | ± 15      |
| Thickness                    | DIN EN ISO 534 | µm               | 430    | ± 40      |
|                              | DIN EN ISO 536 | mil              | 16.9   | ± 1,57    |
| Gloss BYK                    | ISO 2813       | 60°              | 15     | ± 5       |
| Colour Elrepho UVO (D65)     | ISO 2469       | L                | 97,3   | ± 1,0     |
|                              |                | a                | 0,4    | ± 0,5     |
|                              |                | b                | 2,0    | ± 0,8     |
|                              |                | delta b          | -0,4   | ± 0,6     |
| CIE Whiteness (D65/10°) min. | ISO 2469       |                  | > 79   |           |
| Opacity min.                 | ISO 2469       | %                | > 98   |           |

### Printing Technology

- Inkjet water-based

### Key Applications

- Professional Photo & Fine Art
- Portfolio folders
- Exhibitions
- Fine Art
- Professional photo albums

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**

# J24000 TRUE rag silk Satin 310

## Microporous Coated Rag Paper

### Benefits & Properties

- Fine textured surface
- Pin-sharp details
- High colour consistency and gamut
- 100 % cotton
- Free of optical brighteners
- Water resistance

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**