


# P62321 TRUST premium plus Satin 250

## Microporous Resin-Coated Paper

### Printability

- simplex printable

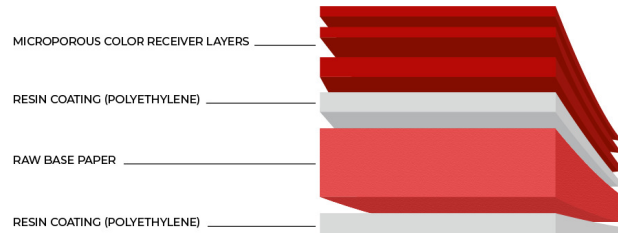

### Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m <sup>2</sup>	254	± 6
Thickness	DIN EN ISO 534	µm	256	± 6
	DIN EN ISO 536	mil	9.9	± 0.2
Gloss BYK	ISO 2813	60°	22	± 5
i1 Pro2		L*MO	96,0	
		a*MO	-0,3	
		b*MO	-1,3	
		L*MI	96,2	
		a*MI	-0,3	
Colour Elrepho UVO (D65)	ISO 2469	b*MI	-2,0	
		L	95,3	± 0,5
		a	-0,1	± 0,3
		b	-1,2	± 0,5
		delta b	-0,1	± 0,5
CIE Whiteness (D65/10°) min.	ISO 2469		> 92	
Opacity min.	ISO 2469	%	> 95	

### Printing Technology

- Inkjet water-based systems

### Certificates

- Fogra 39

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**

# P62321 TRUST premium plus Satin 250

**Microporous Resin-Coated Paper**

## **Key Applications**

- Check Proofs
- Halftone proof
- Mock-ups

## **Benefits & Properties**

- Instant dry
- Reproducibility by outstanding media colour consistency
- No matting due to a high ink load
- Suitable for most difficult spot colours
- Extended colour gamut

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**