


# J93870 TRUE matt Matt 230

## Special-Coated Matt Paper

### Printability

- simplex printable

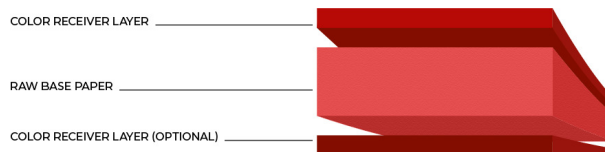

### Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m <sup>2</sup>	229	± 7
Thickness	DIN EN ISO 534	µm	270	± 8
	DIN EN ISO 536	mil	10.6	± 0.31
Colour Elrepho UVO (D65)	ISO 2469	L	95,5	± 1
		a	-0,2	± 0,5
		b	-1,2	± 1
		delta b	13,1	± 0,8
CIE Whiteness (D65/10°) min.	ISO 2469		> 148	
Opacity min.	ISO 2469	%	> 96	

### Printing Technology

- Inkjet water-based

### Certificates

- ISO 9706

### Key Applications

- Black and white photography
- Exhibitions
- Photos
- Photo cards
- Portfolio folders
- Professional Photo & Fine Art
- Professional photo albums

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**

# J93870 TRUE matt Matt 230

## Special-Coated Matt Paper

### Benefits & Properties

- Very smooth surface
- Pin-sharp details
- Vivid colours
- High colour consistency and gamut
- Made from alpha cellulose
- Meets criteria for permanence according ISO 9706

Version: 08/2023

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.

This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

[felix-schoeller.com](http://felix-schoeller.com)



**FELIX SCHOELLER**